


Elasticsearch Service

Logstash Guide

Product Documentation

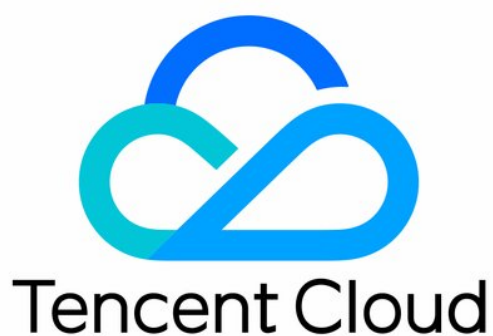

Copyright Notice

©2013-2019 Tencent Cloud. All rights reserved.

Copyright in this document is exclusively owned by Tencent Cloud. You must not reproduce, modify, copy or distribute in any way, in whole or in part, the contents of this document without Tencent Cloud's the prior written consent.

Trademark Notice



All trademarks associated with Tencent Cloud and its services are owned by Tencent Cloud Computing (Beijing) Company Limited and its affiliated companies. Trademarks of third parties referred to in this document are owned by their respective proprietors.

Service Statement

This document is intended to provide users with general information about Tencent Cloud's products and services only and does not form part of Tencent Cloud's terms and conditions. Tencent Cloud's products or services are subject to change. Specific products and services and the standards applicable to them are exclusively provided for in Tencent Cloud's applicable terms and conditions.

Contents

Logstash Guide

YML File Configuration

Logstash Guide

YML File Configuration

Last updated : 2022-06-29 12:25:50

This document describes how to configure the YML parameters of a Tencent Cloud Logstash instance in the ES console.

Directions

1. Log in to the [ES console](#) and click **Logstash Instance** on the left sidebar to enter the Logstash instance list page.
2. Click the **ID/Name** of the target instance to enter its basic information page.
3. On the instance information page, switch to the **Advanced Configuration** tab, click **Modify Configuration**, and modify the YML parameters according to your business needs. For detailed parameter descriptions, see [logstash.yml](#).

The screenshot shows the 'Advanced configuration' tab in the Tencent Cloud ES console. The 'YML configuration' section is highlighted, showing a table of parameters and a 'Modify configuration' button.

Parameter name	Parameter description	Current value	Value description
indices.fielddata.cache.size	Specifies the percentage of java heap space that is assi...	Not configured	Percentage; format: 1%-100%; default: 15%
indices.query.bool.max_clause_count	Specifies the maximum number of clauses allowed in a ...	Not configured	An integer from the range [1, 2147483647]; the default ...

4. After configuring the YML parameters, click **Save**. You will be prompted to restart the Logstash instance. The changes can take effect only after the instance is restarted, so the instance will be restarted after you click **Confirm**. You can view the restart progress in **Change History**.