

# 云资源自动化 for Terraform

## 常见问题



腾讯云

## 【 版权声明 】

©2013–2024 腾讯云版权所有

本文档（含所有文字、数据、图片等内容）完整的著作权归腾讯云计算（北京）有限责任公司单独所有，未经腾讯云事先明确书面许可，任何主体不得以任何形式复制、修改、使用、抄袭、传播本文档全部或部分内容。前述行为构成对腾讯云著作权的侵犯，腾讯云将依法采取措施追究法律责任。

## 【 商标声明 】



及其它腾讯云服务相关的商标均为腾讯云计算（北京）有限责任公司及其关联公司所有。本文档涉及的第三方主体的商标，依法由权利人所有。未经腾讯云及有关权利人书面许可，任何主体不得以任何方式对前述商标进行使用、复制、修改、传播、抄录等行为，否则将构成对腾讯云及有关权利人商标权的侵犯，腾讯云将依法采取措施追究法律责任。

## 【 服务声明 】

本文档意在向您介绍腾讯云全部或部分产品、服务的当时的相关概况，部分产品、服务的内容可能不时有所调整。您所购买的腾讯云产品、服务的种类、服务标准等应由您与腾讯云之间的商业合同约定，除非双方另有约定，否则，腾讯云对本文档内容不做任何明示或默示的承诺或保证。

## 【 联系我们 】

我们致力于为您提供个性化的售前购买咨询服务，及相应的技术售后服务，任何问题请联系 4009100100或 95716。

---

## 文档目录

### 常见问题

签名错误

Init 加速

开启日志追踪

管理现存资源

状态锁

# 常见问题

## 签名错误

最近更新时间：2023-07-17 16:46:42

### 现象描述

下载或更新 Provider 出现如下报错信息：

```
Initializing the backend...
```

```
Initializing provider plugins...
```

```
- Checking for available provider plugins on https://releases.hashicorp.com...
```

```
Error installing provider "tencentcloud": openpgp: signature made by unknown entity.
```

Terraform analyses the configuration and state and automatically downloads plugins for the providers used. However, when attempting to download this plugin an unexpected error occurred.

This may be caused if for some reason Terraform is unable to reach the plugin repository. The repository may be unreachable if access is blocked by a firewall.

If automatic installation is not possible or desirable in your environment, you may alternatively manually install plugins by downloading a suitable distribution package and placing the plugin's executable file in the following directory:

```
terraform.d/plugins/darwin_amd64
```

### 问题定位

参考 [官网说明](#)，可得知是 Terraform 版本过低导致更新失败。

### 处理步骤

更新 Terraform 版本大于等于0.11.15版本即可。

# Init 加速

最近更新时间：2023-07-18 16:31:01

## 现象描述

下载或更新 Provider 出现如下报错信息：

```
Initializing the backend...

Initializing provider plugins...
- Finding latest version of tencentcloudstack/tencentcloud...

| Error: Failed to install provider
|
| Error while installing tencentcloudstack/tencentcloud v1.78.5: could not query
| provider registry for registry.terraform.io/tencentcloudstack/tencentcloud: failed to
| retrieve authentication checksums for provider: the request failed after 2 attempts,
| please try again later: Get
| "https://github.com/tencentcloudstack/terraform-provider-
| tencentcloud/releases/download/v1.78.5/terraform-provider-
| tencentcloud_1.78.5_SHA256SUMS": context deadline exceeded
|
```

或者下载很慢：

```
Initializing the backend...

Initializing provider plugins...
- Finding latest version of tencentcloudstack/tencentcloud...

| Error: Failed to query available provider packages
|
| Could not retrieve the list of available versions for provider
| tencentcloudstack/tencentcloud: could not connect to registry.terraform.io: Failed to
| request discovery document: Get "https://registry.terraform.io/well-
| known/terraform.json": net/http: request canceled while waiting for connection
| (Client.Timeout exceeded while awaiting headers)
|
```

## 问题定位

Terraform 的默认镜像源 `registry.terraform.io` 部署在国外，在国内拉取镜像时可能存在网络问题导致拉取速度慢、甚至无法成功拉取。为解决此问题，您可以使用腾讯云提供的 [镜像源](#)。

## 操作步骤

### 创建 Terraform CLI 配置文件

按需创建 `.terraformrc` 或 `terraform.rc` 配置文件，您可以将其与其他配置文件放在一个文件夹内，位置取决于主机操作系统：

- 在 Windows 上，该文件必须命名 `terraform.rc`，并放置在相关用户的 `%APPDATA%` 目录中。该目录的物理位置取决于您的 Windows 版本和系统配置；可以在 PowerShell 中使用 `$env:APPDATA` 查找其在系统上的位置。
- 在所有其他系统上，文件必须命名 `.terraformrc`，并直接放在相关用户的 home 目录中。Terraform CLI 配置文件的位置也可以使用 `TF_CLI_CONFIG_FILE` 环境变量来指定。任何此类文件都应遵循命名模式 `*.tfrc`，详情见 [Terraform 官网指引](#)。

以 MacOS 为例，创建 `.terraformrc` 文件在用户的 home 目录下，内容如下：

```
provider_installation {
  network_mirror {
    url = "https://mirrors.tencent.com/terraform/"
    // 限制只有腾讯云相关Provider, 从url中指定镜像源下载
    include = ["registry.terraform.io/tencentcloudstack/*"]
  }
  direct {
    // 声明除了腾讯云相关Provider, 其它Provider依然从默认官方源下载
    exclude = ["registry.terraform.io/tencentcloudstack/*"]
  }
}
```

### 运行 terraform init

在您保存 Terraform 配置文件的目录下，执行 `terraform init` 命令初始化配置。

此步骤中，Terraform 会自动检测配置文件中的 `provider` 字段，并下载最新版本的模块和插件。若打印如下信息，则表示初始化成功。

```
Initializing the backend...
```

```
Initializing provider plugins...
```

```
- Finding latest version of tencentcloudstack/tencentcloud...
```

```
- Installing tencentcloudstack/tencentcloud v1.78.5...
```

```
- Installed tencentcloudstack/tencentcloud v1.78.5 (verified checksum)
```

Terraform has created a lock file `.terraform.lock.hcl` to record the provider selections it made above. Include this file in your version control repository so that Terraform can guarantee to make the same selections by default when you run `"terraform init"` in the future.

```
| Warning: Incomplete lock file information for providers
```

```
| Due to your customized provider installation methods, Terraform was forced to calculate lock file checksums locally for the following providers:
```

```
| - tencentcloudstack/tencentcloud
```

```
| The current .terraform.lock.hcl file only includes checksums for darwin_amd64, so Terraform running on another platform will fail to install these providers.
```

```
| To calculate additional checksums for another platform, run:
```

```
| terraform providers lock -platform=linux_amd64
```

```
| (where linux_amd64 is the platform to generate)
```

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running `"terraform plan"` to see any changes that are required for your infrastructure. All Terraform commands should now work.

If you ever set or change modules or backend configuration for Terraform, rerun this command to reinitialize your working directory. If you forget, other commands will detect it and remind you to do so if necessary.

# 开启日志追踪

最近更新时间：2023-07-17 16:46:01

## 操作场景

本文介绍如何在本地开启日志追踪，以获取更详细的日志，便于自查及协助工单处理。

## 操作步骤


1. 在 CLI 中执行 `terraform apply` 前，可以使用以下命令开启本地日志跟踪：

```
export TF_LOG=DEBUG
export TF_LOG_PATH=./terraform.log
```

2. 开启后，再次执行以下命令。

```
terraform apply/destroy
```

执行完毕后，可查看 Terraform 本地文件夹会生成一个 `terraform.log` 的文件。文件记录了 `tencentcloud provider` 定义的日志输出。如下图所示：

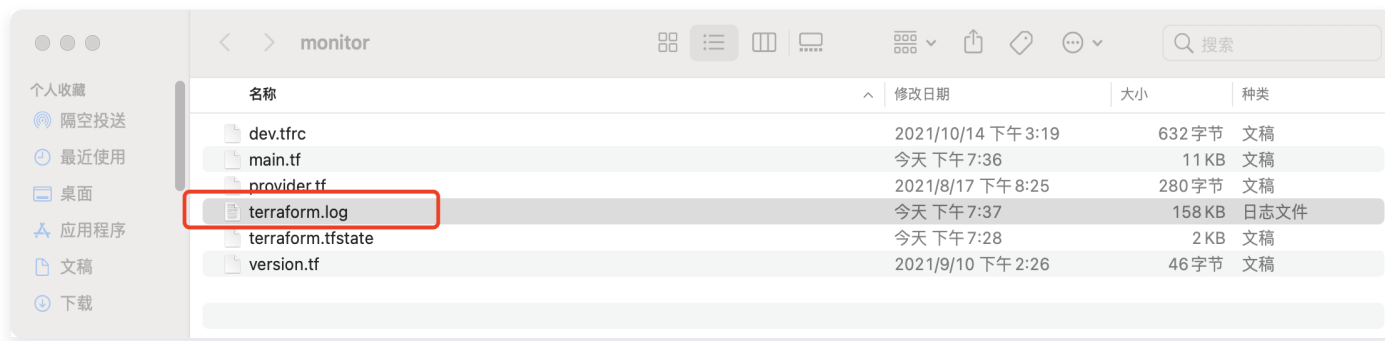

## 示例

以下为执行出错示例，及分析定位问题的过程。本例中创建了一个 K8S cluster 并挂载一台已经存在的 CVM 作节点。

```
→ terraform apply
```

```
2021/12/09 17:53:02 [WARN] Log levels other than TRACE are currently unreliable,
and are supported only for backward compatibility.
Use TF_LOG=TRACE to see Terraform's internal logs.
```



```
----  
data.tencentcloud_instance_types.default: Refreshing state...  
data.tencentcloud_cbs_storages.storages: Refreshing state...  
data.tencentcloud_vpc_subnets.vpc2: Refreshing state...  
data.tencentcloud_images.default: Refreshing state...  
data.tencentcloud_vpc_subnets.vpc: Refreshing state...  
An execution plan has been generated and is shown below.  
Resource actions are indicated with the following symbols:  
+ create
```

Terraform will perform the following actions:

```
# tencentcloud_kubernetes_cluster.managed_cluster will be created  
+ resource "tencentcloud_kubernetes_cluster" "managed_cluster" {  
  + certification_authority    = (known after apply)  
  + claim_expired_seconds     = 300  
  + cluster_as_enabled        = false  
  + cluster_cidr              = "10.1.0.0/16"  
  + cluster_deploy_type       = "MANAGED_CLUSTER"  
  + cluster_desc              = "test cluster desc"  
  + cluster_external_endpoint = (known after apply)  
  + cluster_internet          = false  
  + cluster_intranet         = false  
  + cluster_ipvs              = true  
  + cluster_max_pod_num       = 32  
  + cluster_max_service_num   = 32  
  + cluster_name              = "keep"  
  + cluster_node_num          = (known after apply)  
  + cluster_os                = "ubuntu16.04.1 LTSx86_64"  
  + cluster_os_type           = "GENERAL"  
  + cluster_version           = "1.10.5"  
  + container_runtime         = "docker"  
  + deletion_protection       = false  
  + domain                    = (known after apply)  
  + id                        = (known after apply)  
  + ignore_cluster_cidr_conflict = false  
  + is_non_static_ip_mode     = false  
  + kube_config               = (known after apply)  
  + network_type              = "GR"  
  + node_name_type            = "lan-ip"  
  + password                  = (known after apply)  
  + pgw_endpoint              = (known after apply)  
  + security_policy           = (known after apply)  
  + user_name                 = (known after apply)  
  + vpc_id                    = "vpc-h70b6b49"
```

```

+ worker_instances_list    = (known after apply)

+ worker_config {
  + availability_zone      = "ap-guangzhou-3"
  + count                  = 1
  + enhanced_monitor_service = false
  + enhanced_security_service = false
  + instance_charge_type   = "POSTPAID_BY_HOUR"
  + instance_charge_type_prepaid_period = 1
  + instance_charge_type_prepaid_renew_flag = "NOTIFY_AND_MANUAL_RENEW"
  + instance_name          = "sub machine of tke"
  + instance_type          = "S1.SMALL1"
  + internet_charge_type   = "TRAFFIC_POSTPAID_BY_HOUR"
  + internet_max_bandwidth_out = 100
  + password               = (sensitive value)
  + public_ip_assigned     = true
  + subnet_id              = "subnet-1uwh63so"
  + system_disk_size       = 60
  + system_disk_type       = "CLOUD_SSD"
  + user_data               = "dGVzdA=="

  + data_disk {
    + disk_size = 50
    + disk_type = "CLOUD_PREMIUM"
  }
}
}

# tencentcloud_kubernetes_cluster_attachment.test_attach will be created
+ resource "tencentcloud_kubernetes_cluster_attachment" "test_attach" {
  + cluster_id    = (known after apply)
  + hostname      = "user"
  + id            = (known after apply)
  + instance_id   = "ins-lmnl6t1g"
  + labels        = {
    + "test1" = "test1"
    + "test2" = "test2"
  }
  + password      = (sensitive value)
  + security_groups = (known after apply)
  + state         = (known after apply)

  + worker_config {
    + docker_graph_path = "/var/lib/docker"
    + is_schedule       = true
  }
}
    
```

```

+ data_disk {
  + auto_format_and_mount = false
  + disk_size             = 50
  + disk_type             = "CLOUD_PREMIUM"
}
}
}

```

Plan: 2 to add, 0 to change, 0 to destroy.

Do you want to perform these actions?

Terraform will perform the actions described above.

Only 'yes' will be accepted to approve.

Enter a value: yes

tencentcloud\_kubernetes\_cluster.managed\_cluster: Creating...

```

Error: [TencentCloudSDKError] Code=InternalServerError.CidrConflictWithOtherCluster,
Message=DashboardError,Code : -10013 , Msg :
CIDR_CONFLICT_WITH_OTHER_CLUSTER[cidr 10.1.0.0/16 is conflict with cluster id: cls-
1zc0kpyo], err : CheckCIDRWithVPCClusters failed,CIDR(10.1.0.0/16) conflict with
clusterCIDR,ClusterID:cls-
1zc0kpyo,clusterCIDR:10.1.0.0/16,err:CIDR1:10.1.0.0/16,firstIP:10.1.0.0,conflict with
CIDR2:10.1.0.0/16, RequestId=d7dfb178-f081-480a-9bc3-89efc5fb1db5

```

```

on main.tf line 424, in resource "tencentcloud_kubernetes_cluster"
"managed_cluster":
424: resource "tencentcloud_kubernetes_cluster" "managed_cluster" {

```

### CLI 提示错误如下:

```

[TencentCloudSDKError] Code=InternalServerError.CidrConflictWithOtherCluster,
Message=DashboardError,Code : -10013 , Msg :
CIDR_CONFLICT_WITH_OTHER_CLUSTER[cidr 10.1.0.0/16 is conflict with cluster id: cls-
1zc0kpyo], err : CheckCIDRWithVPCClusters failed,CIDR(10.1.0.0/16) conflict with
clusterCIDR,ClusterID:cls-
1zc0kpyo,clusterCIDR:10.1.0.0/16,err:CIDR1:10.1.0.0/16,firstIP:10.1.0.0,conflict with
CIDR2:10.1.0.0/16, RequestId=d7dfb178-f081-480a-9bc3-89efc5fb1db5

```

### 问题分析及定位:

1. 找到 requestId: d7dfb178-f081-480a-9bc3-89efc5fb1db5

2. 打开 terraform.log ，搜索该 requestId，找到上下文如下所示：

```
2021-12-09T17:53:20.222+0800 [DEBUG] plugin.terraform-provider-tencentcloud.exe: 2021/02/25 17:53:20 [DEBUG] setting computed for "worker_instances_list" from ComputedKeys

_CONFLICT_WITH_OTHER_CLUSTER[cidr 10.1.0.0/16 is conflict with cluster id: cls-1zc0kpyo], err : CheckCIDRWithVPCClusters failed,CIDR(10.1.0.0/16) conflict with clusterCIDR,ClusterID:cls-1zc0kpyo,clusterCIDR:10.1.0.0/16,err:CIDR1:10.1.0.0/16,firstIP:10.1.0.0,conflict with CIDR2:10.1.0.0/16"},"RequestId":"d7dfb178-f081-480a-9bc3-89efc5fb1db5"}},cost 370.8109ms

6 is conflict with cluster id: cls-1zc0kpyo], err : CheckCIDRWithVPCClusters failed,CIDR(10.1.0.0/16) conflict with clusterCIDR,ClusterID:cls-1zc0kpyo,clusterCIDR:10.1.0.0/16,err:CIDR1:10.1.0.0/16,firstIP:10.1.0.0,conflict with CIDR2:10.1.0.0/16, RequestId="40d3ee5d-f723-4ef9-8f01-32d725464d51

2021-12-09T17:53:20.593+0800 [DEBUG] plugin.terraform-provider-tencentcloud.exe: 2021/12/09 17:53:20 common.go:79: [DEBUG] [ELAPSED] resource.tencentcloud_kubernetes_cluster.create elapsed 371 ms
```

3. 分析日志，可定位是创建 K8s cluster 过程中出现问题。示例中是因为 cidr 与已存在的其他 K8s cluster 有冲突造成的。

**说明：**

若 CLI 提示错误信息不够清晰，或无 requestId 的报错造成定位有困难，可将 tf 项目文件，CLI 提示错误以及其产生的日志 terraform.log 文件通过 [提交工单](#) 请求协助。

# 管理现存资源

最近更新时间：2023-07-27 15:29:01

## 操作场景

若您在使用 Terraform 管理云资源之前，已经通过腾讯云控制台创建了资源，则可参考本文进行操作，将现存资源使用 Terraform 管理。

## 操作步骤

使用 Terraform 接管已经存在的资源，实际上在 Terraform 源文件和状态文件里都反映出该资源的状态即可。本文以使用 Terraform 管理现存 PostgreSQL 告警策略为例。

## 获取资源 ID

1. 登录腾讯云可观测平台，选择左侧导航栏中的 [告警管理](#)。
2. 在告警管理页面选择策略管理，找到并记录该策略 ID。如下图所示：



策略名称	监控类型	策略类型	告警规则	策略所属...	关联实例数	通知模板	最后修改	告警启停	操作
policy-	云产品监控	云数据库-PostgreSQL	CPU利用率 > 90%，统计粒度1分钟，连续5次... HA切换，只告警一次	默认项目	1个	系统预设通知模板	100020612675 2021/12/23 19:14:10	<input checked="" type="checkbox"/>	复制 删除 告警历史 设为默认策略

## 导入资源文件

1. 进入 Terraform 工作目录，执行以下命令，查看 main.tf 内容。

```
tencent-cloud cat main.tf
```

返回结果如下所示：

```
resource "tencentcloud_monitor_alarm_policy" "policy" {}
```

2. 在文件所在目录下执行以下命令，完成初始化工作。

```
terraform init --upgrade
```

返回结果如下所示：

```
Initializing the backend...
```

```
Initializing provider plugins...
```

```
- Finding latest version of tencentcloudstack/tencentcloud...  
- Installing tencentcloudstack/tencentcloud v1.60.22...  
- Installed tencentcloudstack/tencentcloud v1.60.22 (signed by a HashiCorp  
partner, key ID 84F69E1C1BECF459)
```

```
Partner and community providers are signed by their developers.
```

```
If you'd like to know more about provider signing, you can read about it here:  
https://www.terraform.io/docs/cli/plugins/signing.html
```

```
Terraform has made some changes to the provider dependency selections recorded  
in the .terraform.lock.hcl file. Review those changes and commit them to your  
version control system if they represent changes you intended to make.
```

```
Terraform has been successfully initialized!
```

```
You may now begin working with Terraform. Try running "terraform plan" to see  
any changes that are required for your infrastructure. All Terraform commands  
should now work.
```

```
If you ever set or change modules or backend configuration for Terraform,  
rerun this command to reinitialize your working directory. If you forget, other  
commands will detect it and remind you to do so if necessary.
```

### 3. 初始化完成后，执行以下命令，将资源导入状态文件。

```
terraform import tencentcloud_monitor_alarm_policy.policy policy-vor9w72r
```

返回信息如下所示：

```
→ terraform import tencentcloud_monitor_alarm_policy.policy policy-vor9w72r  
  
tencentcloud_monitor_alarm_policy.policy: Importing from ID "policy-vor9w72r" ...  
tencentcloud_monitor_alarm_policy.policy: Import prepared!  
  Prepared tencentcloud_monitor_alarm_policy for import  
tencentcloud_monitor_alarm_policy.policy: Refreshing state... [id=policy-vor9w72r]
```

```
Import successful!
```

```
The resources that were imported are shown above. These resources are now in  
your Terraform state and will henceforth be managed by Terraform.
```

4. 执行以下命令，查看状态文件。

```
cat terraform.tfstate
```

可查看如下所示资源相关信息：

```
{
  "version": 4,
  "terraform_version": "1.1.0",
  "serial": 1,
  "lineage": "35791a73-d371-db51-5871-bfee13426217",
  "outputs": {},
  "resources": [
    {
      "mode": "managed",
      "type": "tencentcloud_monitor_alarm_policy",
      "name": "policy",
      "provider": "provider[\\registry.terraform.io/tencentcloudstack/tencentcloud\\]",
      "instances": [
        {
          "schema_version": 0,
          "attributes": {
            "conditions": [
              {
                "is_union_rule": 0,
                "rules": [
                  {
                    "continue_period": 5,
                    "description": "cpu",
                    "filter": [],
                    "is_power_notice": 0,
                    "metric_name": "Cpu",
                    "notice_frequency": 86400,
                    "operator": "gt",
                    "period": 60,
                    "rule_type": "STATIC",
                    "unit": "%",
                    "value": "90"
                  }
                ]
              }
            ]
          }
        }
      ]
    }
  ],
}
```

```
"conditon_template_id": null,
"create_time": null,
"enable": 1,
"event_conditions": [
  {
    "continue_period": 0,
    "description": "HASwitch",
    "filter": [],
    "is_power_notice": 0,
    "metric_name": "ha_switch",
    "notice_frequency": 0,
    "operator": "",
    "period": 0,
    "rule_type": "",
    "unit": "",
    "value": ""
  }
],
"id": "policy-vor9w72r",
"monitor_type": "MT_QCE",
"namespace": "POSTGRESQL",
"notice_ids": [
  "notice-l9ziyxw6"
],
"policy_name": "PgSql",
"project_id": 0,
"remark": "",
"trigger_tasks": [],
"update_time": null
},
"sensitive_attributes": [],
"private": "eyJzY2hlbWFfdmVyc2lvbil6ljAifQ=="
}
]
}
]
}
```

## 更新源文件

1. 执行以下命令，打印资源信息。

```
terraform show
```



返回信息如下所示:

```
# tencentcloud_monitor_alarm_policy.policy:
resource "tencentcloud_monitor_alarm_policy" "policy" {
  enable      = 1
  id          = "policy-vor9w72r"
  monitor_type = "MT_QCE"
  namespace   = "POSTGRESQL"
  notice_ids  = [
    "notice-l9ziyxw6",
  ]
  policy_name = "PgSql"
  project_id  = 0

  conditions {
    is_union_rule = 0

    rules {
      continue_period = 5
      description     = "cpu"
      is_power_notice = 0
      metric_name     = "Cpu"
      notice_frequency = 86400
      operator        = "gt"
      period          = 60
      rule_type       = "STATIC"
      unit            = "%"
      value           = "90"
    }
  }

  event_conditions {
    continue_period = 0
    description     = "HASwitch"
    is_power_notice = 0
    metric_name     = "ha_switch"
    notice_frequency = 0
    period          = 0
  }
}
```

2. 将资源代码拷贝至 Terraform 源文件 `tencentcloud.tf` 中。需删除其中不可设置的选项，例如 ID。完成编辑后，`tencentcloud.tf` 文件内容如下所示：

```
provider tencentcloud {}
resource "tencentcloud_monitor_alarm_policy" "policy" {
  enable      = 1
  # id        = "policy-vor9w72r"
  monitor_type = "MT_QCE"
  namespace   = "POSTGRESQL"
  notice_ids  = [
    "notice-l9ziyxw6",
  ]
  policy_name = "PgSql"
  project_id  = 0

  conditions {
    is_union_rule = 0

    rules {
      continue_period = 5
      description     = "cpu"
      is_power_notice = 0
      metric_name     = "Cpu"
      notice_frequency = 86400
      operator        = "gt"
      period          = 60
      rule_type       = "STATIC"
      unit            = "%"
      value           = "90"
    }
  }

  event_conditions {
    continue_period = 0
    description     = "HASwitch"
    is_power_notice = 0
    metric_name     = "ha_switch"
    notice_frequency = 0
    period          = 0
  }
}
```

## 校验

执行以下命令，使用当前工作目录下的代码和状态文件执行 refresh。

```
terraform plan
```

返回信息如下所示，可查看 Terraform 已成功接管。

```
tencentcloud_monitor_alarm_policy.policy: Refreshing state... [id=policy-vor9w72r]

No changes. Your infrastructure matches the configuration.

Terraform has compared your real infrastructure against your configuration and found
no differences, so no changes are needed.
```

至此，Terraform 已成功接管现存资源。可通过 `destory` 来删除该资源，也可通过修改代码的方式对资源进行修改。例如，修改告警阈值后，执行以下命令进行更新。

```
terraform plan
```

返回信息如下所示，可查看修改的 `value` 会导致 Terraform 提示将会更新这个告警策略。

```
tencentcloud_monitor_alarm_policy.policy: Refreshing state... [id=policy-vor9w72r]

Terraform used the selected providers to generate the following execution plan.
Resource actions are indicated with the following symbols:
~ update in-place

Terraform will perform the following actions:

# tencentcloud_monitor_alarm_policy.policy will be updated in-place
~ resource "tencentcloud_monitor_alarm_policy" "policy" {
  id          = "policy-vor9w72r"
  # (6 unchanged attributes hidden)

  ~ conditions {
    # (1 unchanged attribute hidden)

    ~ rules {
      ~ value          = "90" -> "99"
      # (9 unchanged attributes hidden)
    }
  }

  # (1 unchanged block hidden)
}

Plan: 0 to add, 1 to change, 0 to destroy.
```



# 状态锁

最近更新时间：2023-07-17 16:48:21

## 背景信息

使用 Backend 配置 Terraform 会涉及执行环境和远端状态同步的问题，Terraform 引入了锁的机制避免多个执行环境操作同一个 backend 导致状态不同步，不同厂商均可通过 Terraform 提供的 lock interface 实现自己的状态锁。本文介绍 Cos backend 锁的实现步骤和异常处理。

## 状态锁与文件写入锁

根据 [源码](#) 可知，Cos Backend 执行时会涉及2种锁。

- 状态锁，以 terraform.tfstate.tflock 文件形式出现，记录当前进程的信息并写入 Backend 存储桶：

```
{
  "ID":"1234abcd-1234-cdef-5678-1234567890ab",
  "Operation":"OperationTypePlan",
  "Info": "",
  "Who":"UserName@Host",
  "Version":"1.3.0",
  "Created":"2006-01-02T15:04:05Z07:00",
  "Path":"terraform.tfstate.tflock"
}
```

- 文件写锁，用来避免多个进程同时对存储桶写入 terraform.tfstate.tflock 文件。Cos Backend 以腾讯云标签形式来实现，格式为：tencentcloud-terraform-lock:xxxxxxxxxx（xxxxxxxxxx 为 bucket:lockfile 的 MD5），当文件写入成功后自动释放。

## 上锁步骤

通常情况下，执行 terraform 命令会进行如下步骤：

1. terraform 开始执行（plan / apply 等命令）。
2. Backend 服务对当前账号添加腾讯云标签作为文件写锁。
3. 存储桶检查并写入 terraform.tfstate.tflock 作为状态锁。
4. 删除标签，释放文件写锁。
5. 等待 terraform 执行完毕。
6. 存储桶检查并删除 terraform.tfstate.tflock 取消状态锁。
7. terraform 执行完毕。

## 异常处理

## 场景1

当有进程执行 [上锁步骤](#) 中的步骤4、5、6、7时，如果其他进程尝试操作同一 Backend，则会抛出 Lock Error，示例如下：

```
Error: Error acquiring the state lock

Error message: lock file terraform.tfstate.tflock exists
Lock Info:
  ID:      1234abcd1234cdef56781234567890ab
  Path:    terraform.tfstate.tflock
  Operation: OperationTypePlan
  Who:     UserName@Host
  Version: 1.1.2
  Created: 2006-01-02T15:04:05Z07:00
  Info:

Terraform acquires a state lock to protect the state from being written
by multiple users at the same time. Please resolve the issue above and try
again. For most commands, you can disable locking with the "-lock=false"
flag, but this is not recommended.
```

此时其他执行环境需要等待当前进程执行完毕，或您可按照文中的英文提示加入 `-lock=false` 忽略状态锁重新执行（**不推荐该方式**）。

在此过程中，Terraform 进程意外退出而没有及时释放状态锁，需要您手动解锁：

- 以上文为例，根据锁 ID 执行以下强行解锁命令，即可解锁。

```
terraform force-unlock -force 1234abcd1234cdef56781234567890ab
```

- 删除存储桶下的 terraform.tfstate.tflock 文件也可解锁。

## 场景2

如在执行 [上锁步骤](#) 的步骤3、4时，由于进程中断而退出，标签锁未解开，此时再次进行 terraform 操作会报标签无法创建的异常：

```
Error: Error acquiring the state lock

Error message: 2 errors occurred:
```


```

* failed to create tag: tencentcloud-terraform-lock -> xxxxxxxxxx:
[TencentCloudSDKError] Code=ResourceInUse.TagDuplicate, Message=tagKey-
tagValue have exists.,
RequestId=47c57b0b-2491-42cd-9f29-0b14802681e5
* lock file terraform/state/terraform.tfstate.tflock not exists


Terraform acquires a state lock to protect the state from being written
by multiple users at the same time. Please resolve the issue above and try
again. For most commands, you can disable locking with the "-lock=false"
flag, but this is not recommended.
    
```

此时，Terraform 没有相关命令释放这个锁，您需要手动删除 tencentcloud-terraform-lock:xxxxxxx 标签。您可通过控制台，或调用云 API 接口 [DeleteTag](#) 进行删除。控制台操作步骤如下：

1. 登录标签控制台，选择左侧导航栏中的 [标签列表](#)。
2. 单击如下图所示标签所在行右侧的删除，并在弹出窗口中单击确定即可。

标签列表 标签管理使用指南 

新建标签
删除

标签键 <small>▼</small>	标签值 <small>▼</small>	资源数	操作
<input type="checkbox"/> tencentcloud-terraform-lock	yyyyyyyyy	0	<a href="#">绑定资源</a> <a href="#">删除</a>
<input type="checkbox"/> tencentcloud-terraform-lock	xxxxxxx	0	<a href="#">绑定资源</a> <span style="border: 1px solid red; padding: 2px;">删除</span> 
<input type="checkbox"/> test2	5	0	<a href="#">绑定资源</a> <a href="#">删除</a>